


FORM PTO-1390 (REV 10-94)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE		DOCKET #: 4925-98PUS
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371				
				U.S. APPLICATION NO. (If known, see 37 CFR 1.5) 09/719070
INTERNATIONAL APPLICATION NO PCT/FI99/00562		INTERNATIONAL FILING DATE June 24, 1999		PRIORITY DATE CLAIMED June 24, 1998
TITLE OF INVENTION Method and Network Element for Connecting a Subscriber to a Cellular Telecommunications Network				
APPLICANT FOR DO/EO/US Max HAMBERG				
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:				
1. <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371. <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371 <input checked="" type="checkbox"/> This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1). <input checked="" type="checkbox"/> A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2)) a. <input checked="" type="checkbox"/> is transmitted herewith (required only if not transmitted by the International Bureau). b. <input type="checkbox"/> has been transmitted by the International Bureau. c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US) <input checked="" type="checkbox"/> A translation of the International Application into English (35 U.S.C. 371(c)(2)). <input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)) a. <input checked="" type="checkbox"/> are transmitted herewith (See Reply to PCT Written Opinion) (required only if not transmitted by the International Bureau). b. <input type="checkbox"/> have been transmitted by the International Bureau. c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired. d. <input type="checkbox"/> have not been made and will not be made. 8. <input type="checkbox"/> A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)). 9. <input checked="" type="checkbox"/> An oath or declaration (unexecuted) of the inventor(s) (35 U.S.C. 371(c)(4)). 10. <input type="checkbox"/> A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)). Items 11. To 16. Below concern other document(s) or information included: 11. <input checked="" type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98. 12. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included. 13. <input type="checkbox"/> A FIRST preliminary amendment. <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment. 14. <input type="checkbox"/> A substitute specification. 15. <input type="checkbox"/> A change of power of attorney and/or address letter. 16. <input checked="" type="checkbox"/> Other items or information: International Search Report; PCT Notification of Transmittal of the International Preliminary Examination Report; International Preliminary Examination Report; PCT Written Opinion; Reply to PCT Written Opinion (With Amended Claims); PCT Notice Informing the Applicant of the Communication of the International Application to Designated Offices; PCT Demand; PCT Request; Eight Prior Art References (8).				

28 Rec'd PCT/PTO 07 DEC 2000

U.S. APPLICATION NO. (if known) 09/719070		INTERNATIONAL APPLICATION NO. PCT/FI99/00562		ATTORNEY'S DOCKET NUMBER 4925-98PUS	
17.[x]The following fees are submitted:					
Basic National Fee (37 CFR 1.492(a)(1)-(5)): Search Report has been prepared by the EPO or JPO\$860.00 International preliminary examination fee paid to USPTO (37 CFR 1.482).....\$690.00 No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445(a)(2)).....\$710.00 Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO\$1000.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4)\$100.00					
ENTER APPROPRIATE BASIC FEE AMOUNT =				\$860.00	
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).				\$	
Claims	Number Filed	Number Extra	Rate		
Total Claims	20 - 20 = 0	0	x \$18.00		
Independent Claims	2 - 3 = 0	0	x \$80.00	\$	
Multiple dependent claim(s) (if applicable)			+ \$270.00	\$	
TOTAL OF ABOVE CALCULATIONS =				\$860.00	
Reduction of 1/2 for filing by small entity, if applicable.				\$	
SUBTOTAL =				\$860.00	
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).				\$	
TOTAL NATIONAL FEE =				\$860.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by the appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property				\$	
TOTAL FEES ENCLOSED				\$860.00	
Amount to be refunded:				\$	
charged:				\$	
a. [x] One check in the amount of \$860.00 to cover the above fees is enclosed. b. <input type="checkbox"/> Please charge my Deposit Account No. <u>03-2412</u> in the amount of \$ _____ to cover the above fees. A duplicate copy of this sheet is enclosed. c. [x] The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. <u>03-2412</u> . A duplicate copy of this sheet is enclosed.					
NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.					
SEND ALL CORRESPONDENCE TO: <u>Michael C. Stuart</u> Cohen, Pontani, Lieberman & Pavane 551 Fifth Avenue, Suite 1210 New York, New York 10176			 <u>Michael C. Stuart</u> Registration Number: <u>35,698</u> Tel: (212) 687-2770		

METHOD AND NETWORK ELEMENT FOR CONNECTING A SUBSCRIBER TO A CELLULAR TELECOMMUNICATIONS NETWORK

The invention relates to a method and network element for connecting subscriber apparatus, such as conventional subscriber apparatus of a fixed telephone network, to a mobile network. The invention is advantageously applied to a GSM network, for example.

A prior-art solution is disclosed in patent EP-779 757. Said document discloses a solution in which the users of a fixed telephone network are offered an arrangement where the users of fixed subscriber apparatus can obtain the same services as the users of a mobile network. The patent discloses a method in which a SIM card can be placed in a fixed subscriber apparatus. By means of the SIM card the fixed subscriber apparatus can be connected to a mobile switching center whereby the subscriber's subscriber data can be stored in a visitor location register.

However, the invention disclosed in said EP-779 757 has some drawbacks. In the solution according to the invention disclosed in EP-779 757, the user has to acquire a new subscriber apparatus in order to have access to the mobile network services. This is due to the fact that the access to the mobile network services is in said invention based on the presence of a SIM card in the subscriber apparatus. The cost of new subscriber equipment will be paid direct by the end user. Moreover, in the arrangement disclosed in said publication only fixed subscriber apparatus can be attached to the mobile network.

An object of this invention is to make possible the connection of various subscriber apparatus, such as conventional telephones, to a mobile network. Another object of this invention is to make possible the connection of fixed telephone networks to a mobile network. Yet another object of this invention is to make possible the connection to a mobile network of radio communication networks different from the mobile network serving as the host network.

These and other objects of the invention are achieved by a separate network element connected to a mobile network such that the subscriber apparatus, telephone network or other entity, which is to be connected to the host network, is connected to said network element. Towards the host network the network element emulates the desired host network interface or apparatus and towards the subscriber apparatus or network to be connected to the host network the network element emulates the service entity or interface required by the subscriber apparatus. Advantageously the

network element comprises a memory element storing the additional information possibly needed in the different emulations.

The method according to the invention is characterized by what is expressed in the independent claim directed to the method. The network element according to the invention is characterized by what is expressed in the independent claim directed to the network element. Other preferred embodiments of the invention are presented in the dependent claims.

By means of a separate network element connected to a mobile network it is possible to provide the users of a subscriber's network, such as a fixed telephone network, with the services of the subscriber's network through a mobile network. In a preferred embodiment of the invention the network element is designed to function in such a manner that the mobile network regards the subscriber's network or a subscriber apparatus in the subscriber's network as an element or elements belonging to the mobile network. The operation of the network element is such that it emulates at least one mobile network element towards the mobile network. Conversely, towards the subscriber apparatus the network element emulates the subscriber's network in question, thus producing the signals typical of the subscriber's network.

An advantage of the invention is that by means of the network element according to the invention a given network can be connected to a mobile network. Such a network may be an interphone network, for example. An especially advantageous arrangement can be achieved in the case of sparsely populated areas, wherein a population center can be advantageously connected to the fixed telephone network through a mobile network. Costs will be saved by the fact that there is no need to bring the fixed telephone network to the sparsely populated area over a long distance but calls can be placed using radio waves. The end user will also save costs as current low-cost subscriber apparatus, such as conventional phones, are very well suited to be used in connection with the network element. Moreover, comparing the acquisition cost of the network element and possible fixed subscriber apparatus with the cost of a mobile communications device, it can be seen that the cost of the network element and fixed subscriber apparatus is lower because of the rather simple technology used in them. Especially if the network element is purchased jointly by a population center, for example, telephone connections can be produced at very low costs. In addition to the fixed telephone network the above can be applied to other networks as well.

Another advantage of the invention is that the use of such a network element saves resources. For example in the case of a fixed network the resources of the telephone network of a given area must be dimensioned in accordance with all the fixed subscriber apparatus used in the area. Similarly, the resources of a mobile network in the same area need to be dimensioned according to all mobile communication devices existing in and possibly visiting the area. By means of a network element according to a preferred embodiment of the invention it is possible to combine the services of the fixed telephone network and the mobile network so that the total capacity for the switching center of a given area can be dimensioned according to the combined need, which is smaller than the sum of the capacities needed for separate networks. This can be generalized to apply to all separate telephone networks in which the network element can be used.

A third advantage of the invention is that by means of an apparatus according to the invention an end user of a fixed telephone network can be offered a familiar fixed subscriber apparatus for connecting to the network. In spite of the fact that mobile communication devices are made more and more user-friendly there are still people who find these apparatus intimidating and esoteric and dare not or know not how to use them. Elderly people in particular find mobile communication devices too difficult to use. People say, among other things, that these devices have too many and too small pushbuttons. It is just therefore that people would like to use their familiar fixed telephone apparatus everywhere, say, at the summer house, for example, and indeed the present invention provides a good solution for this.

As far as the mobile network operator is concerned, the network element offers new ways of providing services. At present, an operator concentrating on mobile communications can only offer a mobile subscription with the associated services to a customer. With the new network element the operator can also offer simple and conventional telephone subscriptions in addition to other subscriptions and various services associated with them. This results in competition on the market as regards the provision and providers of different telephone subscriptions, which usually is good for the customer.

Furthermore, an operator may provide the customer with a phone number that looks like a phone number of a fixed telephone subscription. In that case the subscriber's telephone subscription, as regards both the telephone apparatus and phone number, looks like a conventional fixed telephone network subscription. By means of a phone number that looks like a phone number of a fixed subscription it is possible

to eliminate the problem caused by the fact that many people are afraid to call a mobile phone, fearing, among other things, that it will be expensive. An operator could e.g. make a contract with a local phone company for the use of phone numbers resembling fixed subscriber's numbers in subscriber apparatus connected to the network element or otherwise arrange the use of phone numbers typical of that particular area.

The network element according to the invention makes it possible to transport the user's subscriber identity from a mobile communication device to the network element whereby the subscriber apparatus connected to the network element functions as a user terminal. The user may also transport the subscriber identity in the opposite direction, i.e. transfer the subscriber data corresponding to the subscriber apparatus to a SIM card, and continue using the telephone subscription through a mobile communication device. Thus the network element according to the invention facilitates the addition of mobility to fixed telephone networks as well as location updates from a fixed subscriber terminal to a mobile communication device and vice versa, and from a fixed subscriber terminal to a second fixed subscriber terminal.

By means of the network element according to the invention the user of a fixed subscriber apparatus can be offered all services of a modern digital wire network. Typically there are digital wire networks only in big cities at present. By means of the network element all these services can be offered to people living in sparsely populated areas as well. Typical services in a digital wire network include call transfer and answering services, for example. There are other services, too. Moreover, considering that the network element uses a mobile network, the user of the network element can be provided with all the mobile network services that can be controlled using the pushbuttons of a fixed subscriber apparatus.

The invention will now be described in more detail with reference to the preferred embodiments presented by way of example and to the accompanying drawing wherein

- Fig. 1 shows an embodiment of the network element according to the invention,
Fig. 2 shows an embodiment of the network element according to the invention, wherein conventional fixed subscriber apparatus are connected to the input side of the network element,
Fig. 3 shows an embodiment of the network element according to the invention, wherein switching centers of a fixed telephone network are connected to the input side of the network element,

- Fig. 4 shows an embodiment of the network element according to the invention, wherein a radio network is connected to the input side,
- Fig. 5 shows an embodiment of the network element according to the invention, wherein an interphone network is connected to the input side,
- 5 Fig. 6 shows a network element according to the invention in a mobile network wherein the network element emulates a radio interface, and
- Fig. 7 shows a network element according to the invention in a mobile network wherein the network element emulates an interface between a base station and base station controller.

10

Like elements in the drawing are denoted by like reference designators.

Fig. 1 illustrates an embodiment of the network element 11 according to the invention. The network element 11 may be placed advantageously between two different networks, such as a mobile network and fixed telephone network, to emulate a suitable interface for each network. The emulation may be advantageously realized using a microprocessor 14, for example, which has been programmed so as to produce at least the signals required by each network connected to the network element 11.

The network element 11 may comprise in addition to the emulation block, such as a microprocessor 14, a switching block 12, such as a switching network circuit 12, input unit 16 and output unit 13. The function of the input unit 16 is to provide the necessary interface or interfaces at the input side of the network element and, conversely, the function of the output unit 13 is to provide the necessary interface or interfaces at the output side of the network element. For example, in an embodiment of the invention the input unit may comprise one or more analog line interface cards (LIA). The function of the switching network circuit 12 is advantageously at least to switch speech signals and, thus, telephone calls. 'Switching' may here also mean that while there may be a great number of subscriber apparatus connected to the input unit 16 of the network element 11, the network element 11 would still be able to connect the calls, utilizing prior-art technology, to the outlets of the output unit 13, i.e. to the mobile network signal lines connected to the output unit of which there may be less than there are inlets at the input side, i.e. signal lines in the system connected to the mobile network. In this case, the mobile network signal lines may be e.g. speech channels of the mobile network. 'Input side' here refers to that side of the network element 11 which is not connected to the host network and, conversely, 'output side' refers to the side connected to the host network. So, in addi-

tion to or in parallel with switching functions the network element may include concentrating functions as well.

In this description, 'host network' refers to the mobile network or its part, such as a core network (CN), to which the entity to be connected, which typically is smaller
5 than the mobile network, is to be connected by means of the network element 11.

In addition to the components mentioned above the network element 11 may include at least a database block 15 to provide a database by means of which a subscriber apparatus connected to the network element 11 can be advantageously identified. For example, if the host network is a GSM network, the subscriber data corresponding to the information in the SIM card, i.e. the data or at least part of the
10 data corresponding to the subscriber data of the host network, can be stored in said database or storage element 15. The database 15 may be stored e.g. in a memory circuit or other storage element. The database can preferably be used for storing data required by the host network, which data cannot be obtained from apparatus
15 connected through the network element 11. It is obvious to a person skilled in the art that the storing of the data corresponding to the database 15 in the network element 11 can be realized in other ways, too. In a preferred embodiment the network element 11 may be realized e.g. in such a manner that the data corresponding to the database 15 may be stored in a system located in the network operator's premises
20 from which place the data can be read when necessary. However, the practicability of such an arrangement can be questioned as it would load the network unnecessarily due to increased signal traffic. Centralization of subscriber data in a single database would, however, bring with it the advantages typically associated with centralization.

25 In an embodiment according to the invention it is possible to connect conventional fixed network subscriber apparatus 21 to the input side 16 of the network element 11. An example of such an arrangement is shown in Fig. 2. In such an embodiment the system to be connected to the host network through the network element may comprise e.g. conventional telephones only, plus the necessary interface lines. A
30 fixed subscriber apparatus can be connected to the network element 11 through the input unit 16, which advantageously is a special subscriber interface card, for example. The connection of multiple fixed subscriber apparatus 21 to the network element 11 may be realized e.g. in such a manner that there is one subscriber interface card per each fixed subscriber apparatus 21. The connection may also be
35 realized such that all fixed subscriber apparatus 21 are connected to the network

element 11 through one subscriber interface card. Other solutions, too, can be advantageously used for connecting the subscriber apparatus to the network element 11. In this embodiment the network element 11 realizes the functions required by the subscriber apparatus 21, such as e.g. off-hook and on-hook detection, generation of ringing signal and other necessary functions. Fixed subscriber apparatus 21 are identified in some known manner, e.g. based on the signal line via which the signals of the subscriber apparatus come to the network element. Subscriber apparatus identification may also be realized e.g. by means of signaling, examples of which will be given later on.

Fig. 2 also shows a small portion of the host network and its various elements 92, 93, 94, 90'. In this example the host network comprises elements typical of a mobile network, such as base stations 92, base station controllers 93 controlling one or more base stations, and mobile switching centers 94. Fig. 2 also shows mobile stations 91 connected via radio links to the base stations 92 and the rest of the host network 90'. In the example of Fig. 2 the network element 11 is connected to a mobile switching center 94, realizing the functionality according to the interface between a mobile switching center and base station controller. To the host network the network element 11 thus looks like a base station controller. In this kind of an embodiment the output unit 13 realizes the functionality required by the transmission line between the network element and mobile switching center. In a GSM network this interface 95a between the mobile switching center (MSC) and base station controller (BSC) is called the A interface. In the case of a UMTS network the corresponding interface is called the Iu interface.

In a system according to Fig. 2, placing a call to the subscriber apparatus 21 may according to a preferred embodiment of the invention be carried out e.g. as follows: Let the communications network 90' be a GSM network connected to a conventional telephone network. When a call from the conventional telephone network arrives in the GSM network it is directed to that MSC in the GSM network in the area of which the subscriber apparatus 21 has been registered. Said MSC detects that the subscriber apparatus is registered to be located in the area of the BSC emulated by the network element 11. So the MSC sends a paging message to the network element 11, which responds to the MSC using a page response message according to the A interface. The network element converts the IMSI code mentioned in the paging message into its own identifier, i.e. performs the necessary identity conversion which in the example of Fig. 2 corresponds to detecting the subscriber line that corresponds to the IMSI code. After that the network element generates the

ringing signal for the subscriber line in question. As the user answers the call the network element starts converting speech signals between the subscriber apparatus and the GSM network. When the call is being established the MSC typically verifies, using an authentication procedure, that the terminal in question is the correct terminal. In such a case the network element 11 emulates the operation of the terminal using its subscriber data.

In a preferred embodiment of the invention not all subscriber data that cannot be obtained from subscriber apparatus 21 are stored in a database 15, but at least part of said data are automatically generated as it is needed. This way it is possible to reduce the amount of data stored in the database. The data may be automatically generated e.g. on the basis of some constant information, such as the subscriber's phone number, so that if the method of generation remains the same, the data generated automatically will always be the same, too. Thus it is possible to produce e.g. a fixed piece of information associated with the subscriber data, say, identification information for a terminal. If the information required need not remain constant every time, it may also be generated on the basis of the time of day or randomly, for example.

If some data, such as e.g. certain security parameters, cannot be removed from the SIM card, such data have to be copied from the SIM card to the network element. In that case the network will preferably verify according to security requirements that only one piece of the information is actually used.

In a preferred embodiment of the invention the network element 11 may be connected to a switching apparatus or a corresponding element in a local exchange. Fig. 3 shows such an arrangement in which the network element 11 is functionally connected to a switching apparatus 31 in a local telephone network. It is possible to connect in the manner shown in Fig. 3 more than one switching apparatus 31 to the network element 11 either directly, as shown in Fig. 3, or through other switching apparatus. In this kind of an embodiment the identification of the subscriber apparatus may be realized e.g. by means of signaling used by the switching apparatus 31. Examples of such signaling methods are the ISUP, SS7, and R2 signaling protocols used in the conventional telephone network. In this kind of an embodiment the network element 11 emulates to the switching apparatus the desired interface known to the switching apparatus or e.g. another switching apparatus. Fig. 3 also shows the host network 90.

Fig. 4 illustrates a preferred embodiment of the invention in which a radio network 41 is connected to the host network through the network element 11. The radio network 41 may be e.g. a company's internal radio communication network or a wireless interphone network. In the example depicted in Fig. 4 the radio network 41 includes base stations 43 and switching apparatus 42 of the radio network. The radio network 41 further includes wireless terminals 44 connected to the rest of the radio network 41 via base stations 43. In this kind of an embodiment the wireless terminals 44 correspond to the subscriber apparatus 21 of the examples described above, so that the network element realizes the emulation towards the host network on the basis of the wireless terminal identification data and host network subscription data stored in its memory. In this kind of an embodiment the network element 11 realizes the desired radio network 41 interface functionality towards the radio network 41. For example in the case of a wireless interphone system, such as a DECT system, the network element 11 may emulate a switching apparatus of a conventional telephone system towards the DECT system 41, so that as far as the DECT system is concerned the situation is the same as in the prior art where the DECT system is connected to a switching center of a fixed telephone network, say, the switching center of a company or building.

Generally, the invention network element can be used to emulate functions of terminals, such as mobile communication devices, in the host network, which functions are not provided by the terminals of the system connected to the host network. Particularly the network element can be used to emulate functions requiring processing, which the terminals of said system cannot realize e.g. because they do not have a processor, their processing capacity is too small for realizing the functions in question, or it is impossible to store in the terminal the subscriber data needed by the host network. So, the emulation of a SIM card according to the examples above is just one advantageous example of such functions.

Above it was disclosed by way of example that the network element advantageously includes the additional information, such as e.g. the subscription data of the mobile network, which is needed in the emulation towards the host network but which cannot be obtained from the system connected to the host network. Furthermore, in some embodiments it may be possible that the host network does not provide all the data and services needed by the system connected to the host network. In that case the network element emulates the services needed by said system on the basis of the additional information stored in the network element.

Fig. 5 illustrates a preferred embodiment of the invention in which the network element is used to connect an interphone network 51 of, say, a company or building to the host network 90. Here the interphone network 51 may be e.g. a conventional intercom network, an Intranet network realized by means of a communications network of a company or building, a DECT network or some other interphone network. In the example of Fig. 5 the interphone network comprises several subscriber apparatus 21.

It is also possible to connect some other network, which is not mentioned above, to the input unit 16 of the network element 11. It is obvious to one skilled in the art that the network element 11 can be used to connect to the host network 90 a combination of the networks mentioned above as examples or other similar networks.

The network element may realize towards the host network other interfaces than those mentioned above. Fig. 6 shows a structure according to a preferred embodiment of the invention. In Fig. 6, a plurality of subscriber apparatus 21 are connected to the network element, and the interface between the network element 11 and host network 92, 93, 90 is a radio interface 95b. In this kind of an embodiment the network element emulates a number of mobile communication devices. Of the components of the host network 90 Fig. 6 shows base stations 92 and a base station controller 93. In this kind of an embodiment the network element comprises a transmitter unit to which the necessary antenna equipment is connected. Such a transmitter unit can be realized e.g. in the output unit 13.

Fig. 7 shows a structure according to a preferred embodiment of the invention. In Fig. 7, the network element realizes an interface 95c between a base station and base station controller so that as far as the host network is concerned, the network element functions as a base station. In an embodiment in which the host network is a GSM network, the interface 95c is an Abis interface. In an embodiment in which the host network is a UMTS network, the interface 95c is an Iub interface.

The network element 11 may comprise other elements than those mentioned in the examples above. Such elements include e.g. elements intended for the adaptation of transmission rates, needed when the network element 11 is placed between two networks using different transmission rates. Other necessary adaptation elements may also be included in the network element 11.

Above it was disclosed by way of example that the signals connected by means of the network element are speech signals. The invention is not, however, limited to

this. For example, if both the host network and the system connected to the host network support other types of communications connections, the signals connected may be signals containing other types of data as well.

- 5 The name of a given functional unit, such as a base station controller, is often different in different mobile communication systems. For example, the nearest equivalent in the UMTS to the base station controller (BSC) of the GSM system is, according to some specifications, the radio network controller (RNC). In the claims attached hereto the terms base station controller and mobile switching center are not
- 10 in any way restricted to refer only to the elements of the GSM system, but the terms cover the functionally equivalent elements of other mobile communication systems as well. In the claims attached hereto the term subscriber apparatus refers to the appropriate apparatus in the system to be connected, such as e.g. a conventional phone in a fixed telephone network, a terminal of a wireless interphone network or a corresponding apparatus.
- 15 Above the invention was described referring to some of its preferred embodiments but it is obvious that the invention may be modified in many different ways in accordance with the inventional idea defined by the claims attached hereto.

002027 02067260

Claims

1. A method for connecting a system comprising subscriber apparatus to a mobile network, **characterized** in that the method comprises the steps of
- storing in a network element (11) connected to the mobile network subscriber
 - 5 information corresponding to information in a subscriber identity module of a mobile communication means of the mobile network,
 - emulating towards said mobile network a desired interface of said mobile network,
 - emulating towards said system a desired interface of said system, and
 - connecting signals of said system to the mobile network and signals of the mobile
 - 10 network to said system.
2. A method according to claim 1, **characterized** in that said network element (11) is used to emulate mobile network functions associated with mobile communication devices of the mobile network that are not realized by the subscriber apparatus in said system.
- 15 3. A method according to claim 2, **characterized** in that at least a part of said functions are functions dependent on subscriber information.
4. A method according to claim 1, **characterized** in that the network element is used to receive signals from said system, which signals are coming from signal lines of which there are a certain first number, and received signals are concentrated into
- 20 signal lines of the mobile network of which there are a certain second number such that said second number is smaller than said first number.
5. A method according to claim 1, **characterized** in that said interface is an interface between a base station controller and mobile switching center.
6. A method according to claim 1, **characterized** in that said interface is an
- 25 interface between a base station controller and base station.
7. A method according to claim 1, **characterized** in that said interface is a radio

interface between a mobile communication device and base station.

8. A method according to claim 1, **characterized** in that at least part of the mobile network subscriber data needed by the network element (11) is read from a database (15) stored in the network element.

5 9. A method according to claim 1, **characterized** in that at least part of the mobile network subscriber data needed by the network element (11) is generated automatically.

10. A method according to claim 1, **characterized** in that said system comprises at least one fixed telephone network.

10 11. A method according to claim 1, **characterized** in that said system comprises at least one radio network (41).

12. A method according to claim 1, **characterized** in that said system comprises at least one interphone network (51).

15 13. A network element (11), **characterized** in that it is adapted so as to be connected to a mobile network in order to connect a system with subscriber apparatus to the mobile network through said network element, and that it comprises

- memory means for storing subscriber information corresponding to information in a subscriber identity module of a mobile communication means of the mobile network,

20 - an emulation block for emulating mobile network functions not found in said system, and

- a switching block for connecting signals coming from said system to the mobile network.

25 14. A network element according to claim 13, **characterized** in that said emulation block is arranged so as to emulate mobile network functions associated with

AMENDED SHEET

mobile communication devices of the mobile network which are not provided by said subscriber apparatus in said system.

15. A network element according to claim 13, **characterized** in that it comprises in addition to the emulation block an output unit (13) for realizing functionality according to a predetermined interface of said mobile network.

16. A network element according to claim 15, **characterized** in that said interface is an interface between a base station controller and mobile switching center.

17. A network element according to claim 15, **characterized** in that said interface is an interface between a base station and base station controller.

18. A network element according to claim 15, **characterized** in that said interface is an interface between a mobile communication device and base station.

19. A network element according to claim 12, **characterized** in that it further comprises a database block (15) for storing mobile network subscription data corresponding to subscriber apparatus in said system.

20. A network element according to claim 12, **characterized** in that it further comprises in said memory means subscriber information corresponding to information in a subscriber identity module of a mobile communication means of the mobile network.

AMENDED SHEET

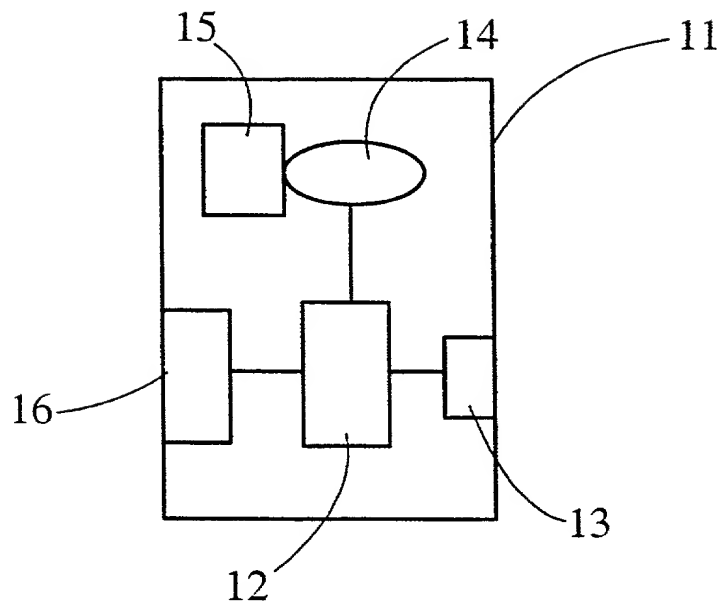


Fig. 1

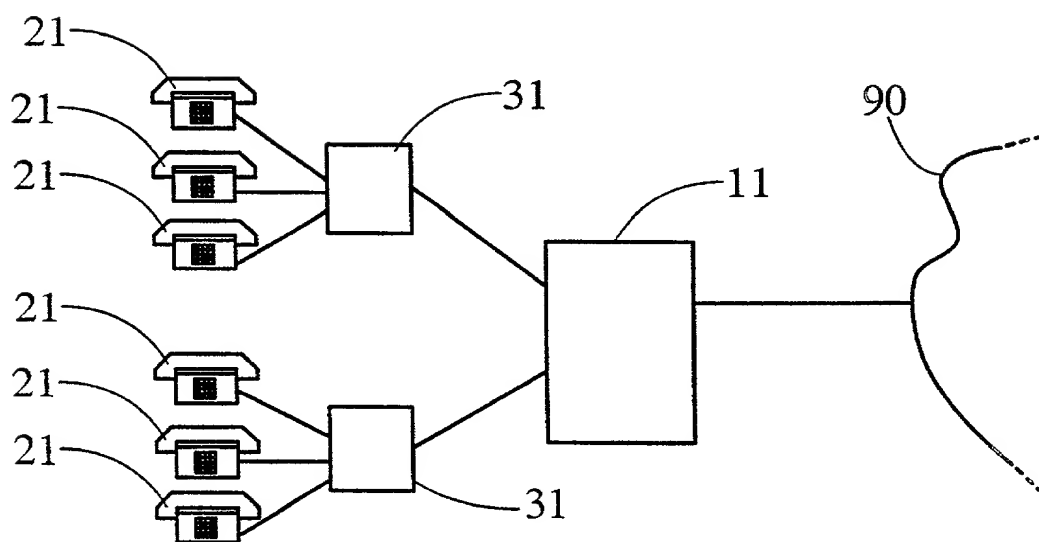
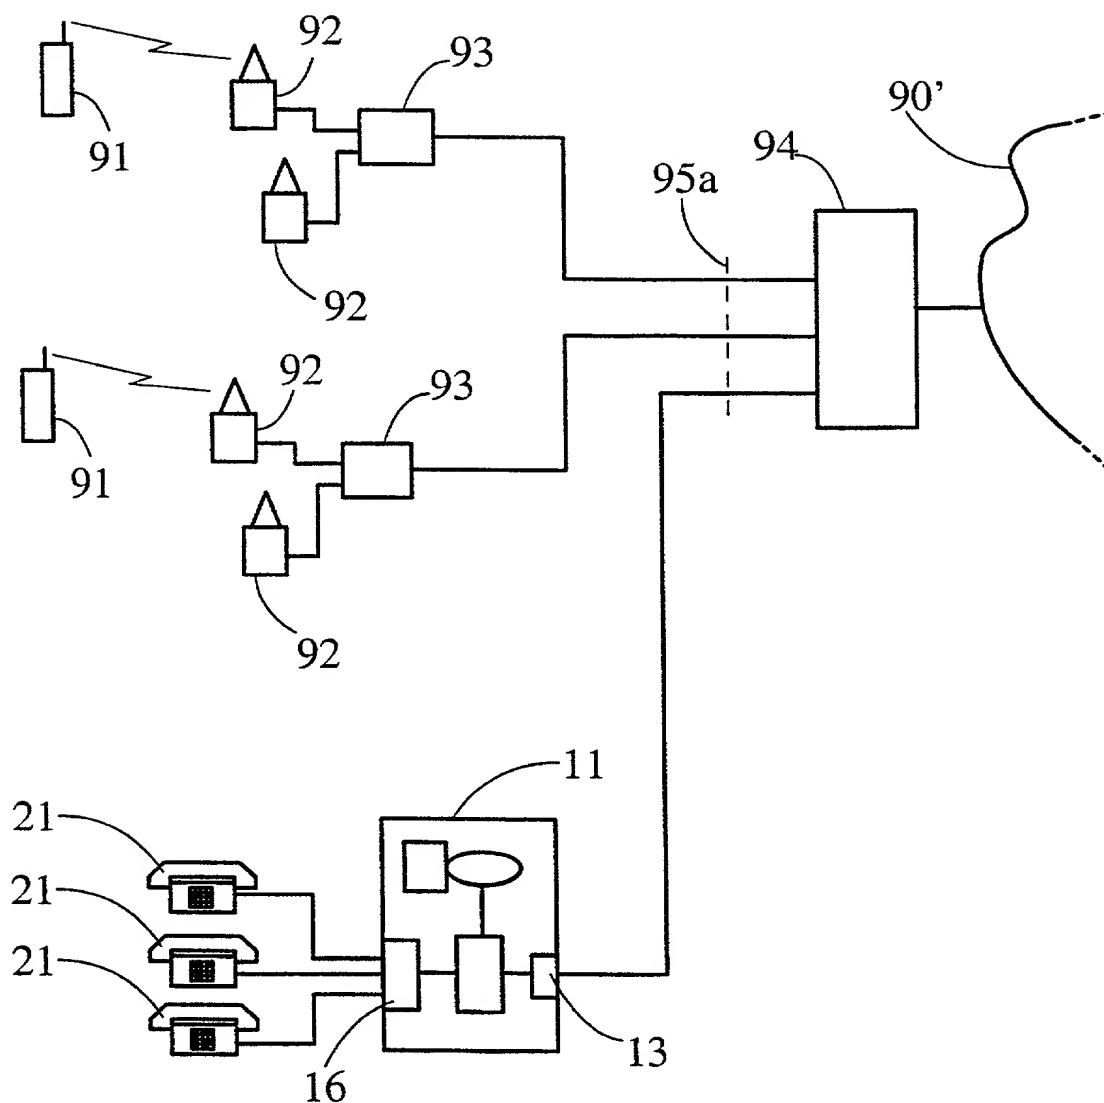
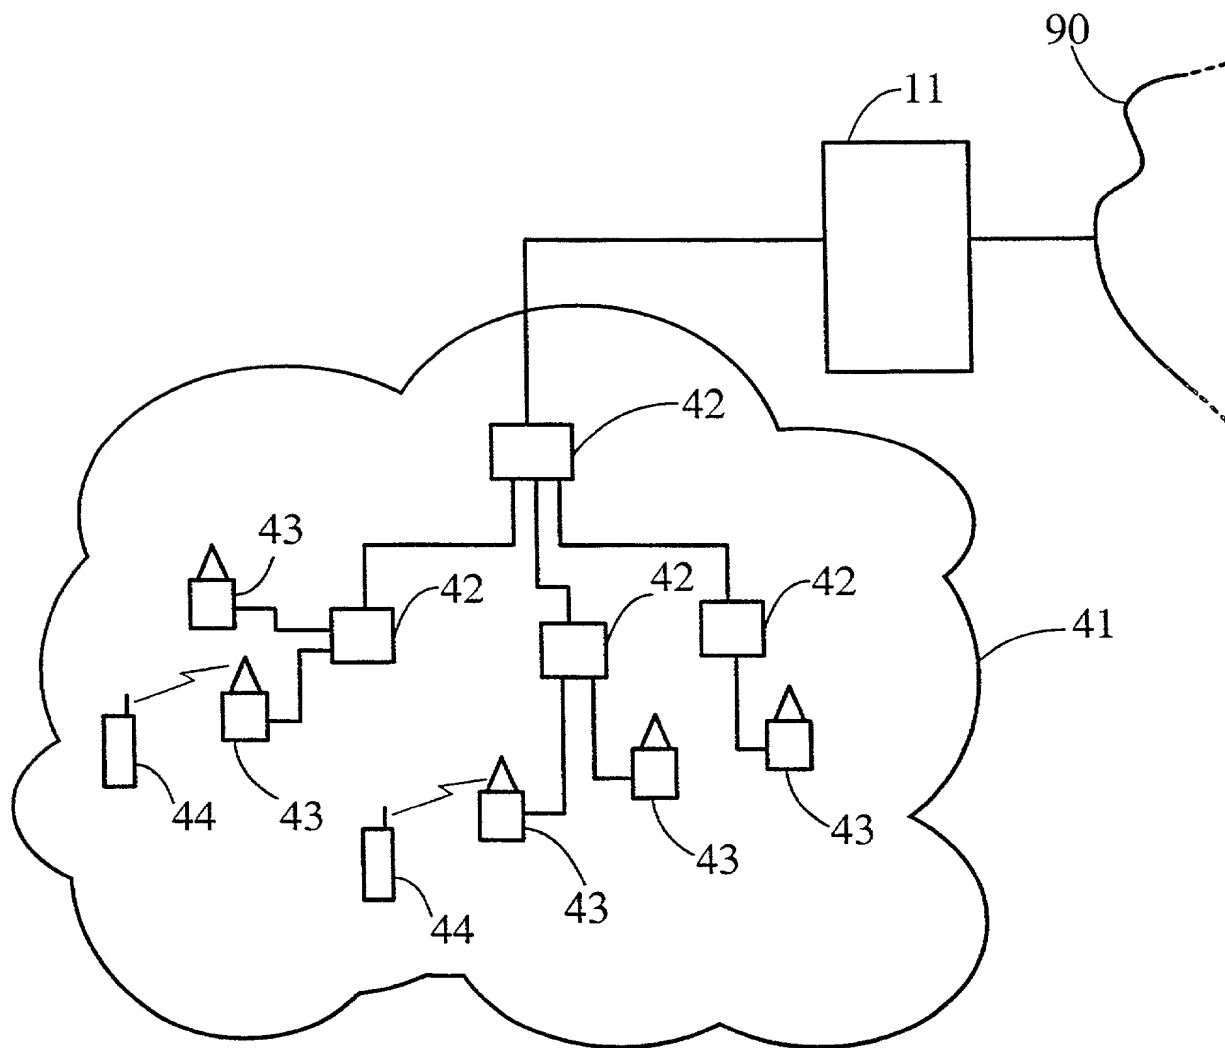


Fig. 3

09/719070-120700

**Fig. 2**

3 / 4

**Fig. 4**

4 / 4

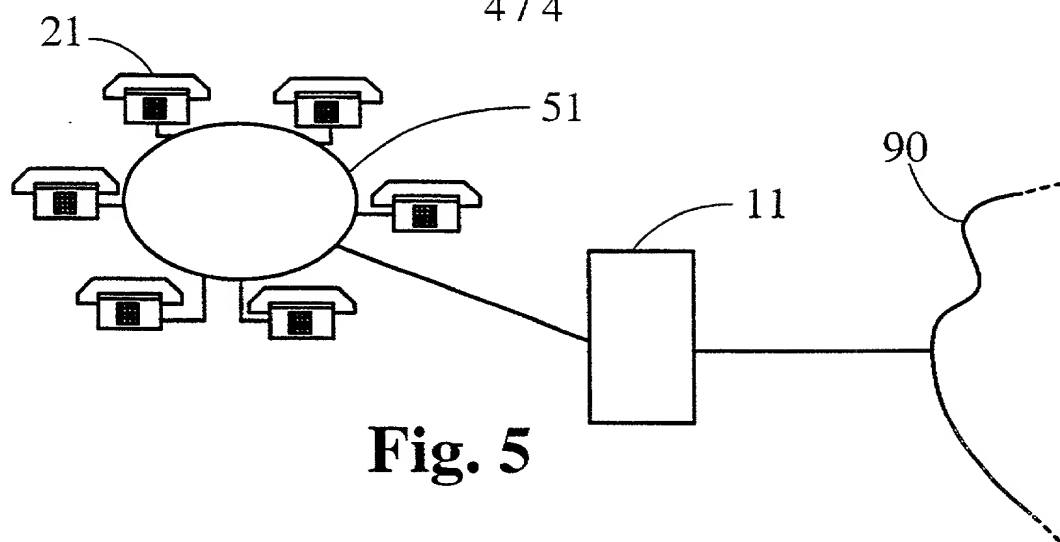


Fig. 5

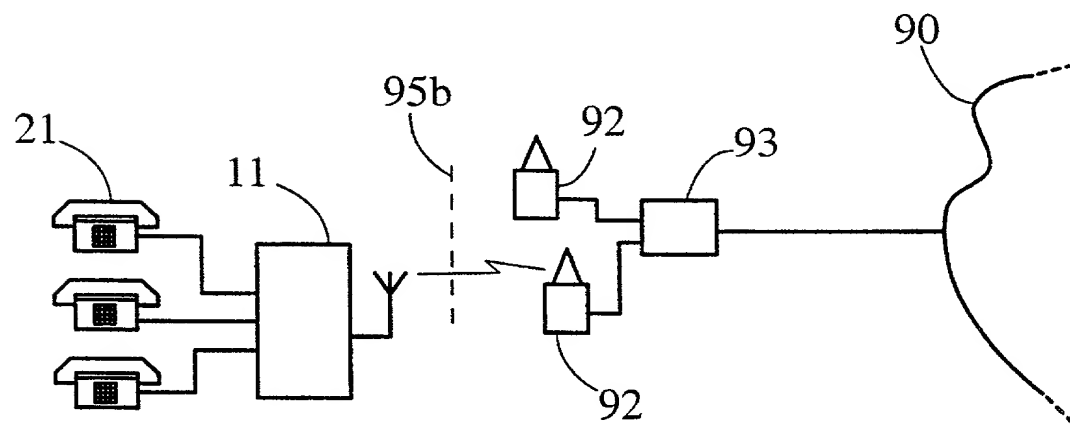


Fig. 6

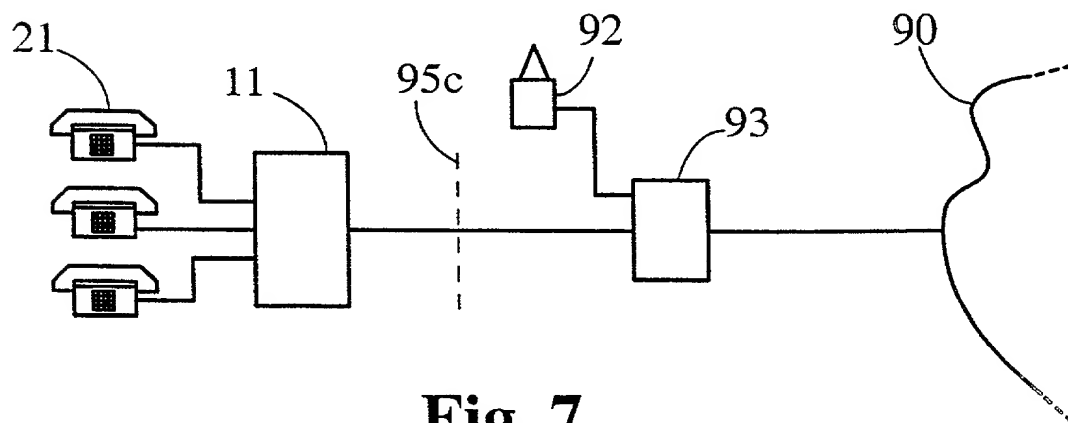


Fig. 7

09/719070-12067260

COMBINED DECLARATION FOR PATENT APPLICATION AND POWER OF ATTORNEY
Includes Reference to PCT International Applications

Attorney's Docket
No. **4925-98PUS**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled:

METHOD AND NETWORK ELEMENT FOR CONNECTING A SUBSCRIBER TO A CELLULAR TELECOMMUNICATIONS NETWORK

the specification of which (check only one item below)

☐ is attached hereto

☐ was filed as United States application

Serial No. _

on _

and was amended

on _ (if applicable).

☒ was filed as PCT international application

Number PCT/FI99/00562

On June 24, 1999

And was amended under PCT Article 19

On _ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of the application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed.

PRIOR FOREIGN/PCT APPLICATIONS AND ANY PRIORITY CLAIMS UNDER 35 U.S.C. 119:

Country (if PCT, indicate "PCT")	Application Number	Date of Filing (day, month, year)	Priority Claimed Under 35 U.S.C. 119	
Finland	981450	June 24, 1998	<input checked="" type="checkbox"/> YES	<input type="checkbox"/> NO
PCT	PCT/FI99/00562	June 24, 1999	<input checked="" type="checkbox"/> YES	<input type="checkbox"/> NO
			<input type="checkbox"/> YES	<input type="checkbox"/> NO
			<input type="checkbox"/> YES	<input type="checkbox"/> NO
			<input type="checkbox"/> YES	<input type="checkbox"/> NO
			<input type="checkbox"/> YES	<input type="checkbox"/> NO
			<input type="checkbox"/> YES	<input type="checkbox"/> NO

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) or PCT international application(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application(s) and the national or PCT international filing date of this application:

PRIOR U.S. APPLICATIONS OR PCT INTERNATIONAL APPLICATIONS DESIGNATING THE U.S. FOR BENEFIT UNDER 35 U.S.C. 120:

U.S. APPLICATIONS		STATUS (check one)		
U.S. APPLICATION NUMBER	U S FILING DATE	PATENTED	PENDING	ABANDONED
PCT APPLICATIONS DESIGNATING THE U.S.				
PCT APPLICATION NO	PCT FILING DATE	U S SERIAL NUMBERS ASSIGNED (if any)		
PCT/FI99/00562	June 24, 1999			

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (*List name and registration number*)

MYRON COHEN, Reg. No. 17,358; THOMAS C. PONTANI, Reg. No. 29,763; LANCE J. LIEBERMAN, Reg. No. 28,437; MARTIN B. PAVANE, Reg. No. 28,337; MICHAEL C. STUART, Reg. No. 35,698; KLAUS P. STOFFEL, Reg. No. 31,668; EDWARD M. WEISZ, Reg. No. 37,257; JULIA S. KIM, Reg. No. 36,567; VINCENT M. FAZZARI, Reg. No. 26,879; ALFRED W. FROEBRICH, Reg. No. 38,887; KENT H. CHENG, Reg. No. 33,849; GEORGE WANG, Reg. No. 41,419; TZVI HIRSHAUT, Reg. No. 38,732; GERALD J. CECHONY, Reg. No. 31,335; ROGER S. THOMPSON, Reg. No. 29,594; JOY I. FARBER, Reg. No. 44,103; and GEORGE J. BRANDT, JR., Reg. No. 22,021.

Send correspondence to:

Michael C. Stuart
Reg. No. 35,698
Cohen, Pontani, Lieberman & Pavane
551 Fifth Avenue, Suite 1210
New York, New York 10176

Direct Telephone calls to:
(name and telephone number)
Michael C. Stuart
(212) 687-2770

2 0 1	FULL NAME OF INVENTOR	FAMILY NAME <u>HAMBERG</u>	FIRST GIVEN NAME <u>Max</u>	SECOND GIVEN NAME
	RESIDENCE, CITIZENSHIP	CITY <u>Helsinki</u>	STATE OR FOREIGN COUNTRY <u>Finland</u> <u>FI</u>	COUNTRY OF CITIZENSHIP <u>Finland</u>
	POST OFFICE ADDRESS	POST OFFICE ADDRESS <u>Lupajantie 1 A 2</u>	CITY <u>FIN-00970 Helsinki</u>	STATE & ZIP CODE/COUNTRY <u>Finland</u>

By Express Mail
No EL660968288US

